















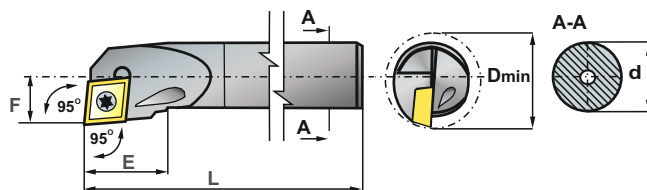





WYTACZAKI Z CHWYTEM SZLIFOWANYM - SYSTEM S. / BORING TOOLS WITH GRINDED SHANK - SYSTEM S.
РАСТОЧНЫЕ РЕЗЦЫ С ШЛИФОВАННЫМ ХВОСТОВИКОМ - СИСТЕМА S.

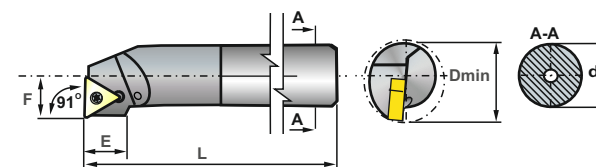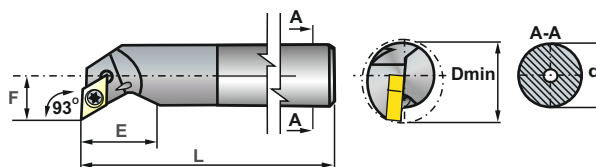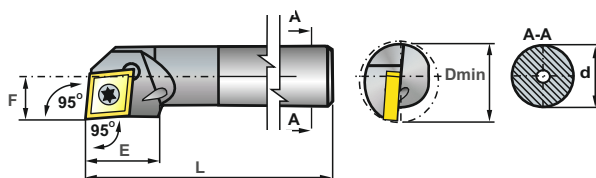

Oznaczenie Designation Обозначение	Waga Weight Вес	Wymiary Dimensions Размеры							ISO  C	Części zamienne / Spare parts / Запасные части	
		Dmin	d(g7)	L	F	E	λ_s	γ_o	PAFANA  C		
A16M-SCLCR/L-09R	0,260	22	16	150	11	19	-5°	0°	CC..09T3..	S-4008S	T 15
A20Q-SCLCR/L-09R	0,376	25	20	180	13	15	-8°	0°			

WYTACZAKI Z CHWYTEM Z WĘGLIKA SPIEKANEGO - SYSTEM S. / BORING BARS WITH SINTERED CARBIDE SHANK - SYSTEM S.
РАСТОЧНЫЕ РЕЗЦЫ СО ХВОСТОВИКОМ ИЗ ТВЕРДЫХ СПЛАВОВ - СИСТЕМА S.



Oznaczenie Designation Обозначение	Waga Weight Вес	Wymiary Dimensions Размеры							ISO  C	 D	 T	Części zamienne / Spare parts / Запасные части	
		Dmin	d	L	F	E	λ_s	γ_o	PAFANA  C	 D	 T		
E08K-SCLCR/L 06-R	0,060	9	8	125	4,5	8	-15°	-1°	CC..0602..			S-2504S	T 7
E10M-SCLCR/L 06-R	0,140	13	10	150	7	12	-13°	-1°					
E12Q-SCLCR/L 09-R	0,240	16	12	180	9	14	-11°	-0°	CC..09T3..			S-4008S	T 15
E16R-SCLCR/L 09-R	0,500	22	16	230	11	19	-5°	-0°					
E20S-SCLCR/L 09-R	1,000	25	20	250	13	14	-5°	-0°					
E12Q-SDUCR/L 07-XR	0,260	18	12	180	11		-8°	-0°	DC..0702..			S-2504S	T 7
E16R-SDUCR/L 07-R	0,500	22	16	200	13		-6°	-0°					
E12Q-STFCR/L 11-R	0,260	16	12	180	9	10,5	-6°	-0°			TC..1102rr	S-2504S	T 7
E16R-STFCR/L 11-R	0,500	20	16	200	11	10,5	-6°	-0°					